




[PAGE BACK](#) [CLOSE](#)

Product Name **Chip Beads**
Series **MMZ Series**
Type **1608-C Type**
Model **t=0.8mm**
Part Number **MMZ1608R102CTA00**

Product Lifecycle Stage PROD

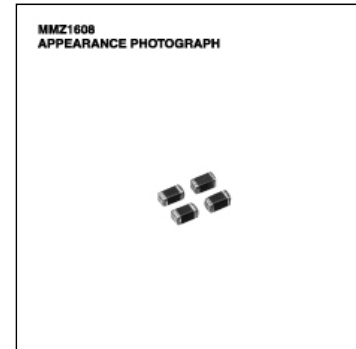

Specification

Mounting Method Flag	Yes	
Processing	MULTI-LAYER	
Shape	Chip	
Number of Circuits	Nom	1
Material Code	R	
Size Code	1608	
Body Length(L)	Nom	1.6 m m
Body Breadth(W)	Nom	0.8 m m
Body Height(T)	Nom	0.8 m m
Impedance	Min	750 Ohm
Impedance	Nom	1000 Ohm
Impedance Tolerance	Min	-25 %
	Max	25 %
Frequency of Impedance	Nom	100 M Hz
Rated Current	Max	0.4 A
DC Resistance	Max	0.45 Ohm
Soldering Method	Flow,Reflow,Iron Soldering	
Category Temperature	Min	-55 Cel
Range	Max	125 Cel
Storage Temperature Range	Min	-55 Cel
	Max	125 Cel
Weight	Nom	0.004 g

Summary/Applications/Feature

Summary	The MMZ series provide effective EMC suppression in signal lines through simple in-series implementation. It is applicable for lead free soldering.
Applications	PC,DVD,CDMA,LCD,PDC
Feature	The MMZ series provide effective EMC suppression in signal lines through simple in-series implementation. High SRF characteristic. It is applicable for lead free soldering.

Packaging

Packing	Punched (Paper)Taping [180mm Reel]	
Minimum Package Qty	Nom	4000 Pcs
Minimum Order Qty	Nom	4000 Pcs

[Details](#)

■ [Caution]

Specifications which provide more details for the proper and safe use of the described product are available upon request.

■ [Notice of Revision and Improve]

All specifications are subject to change without notice.

[PAGE TOP](#)

Copyright(c) 1996-2008 All rights reserved.