


**KEMET Part Number: PHE450HA6100JR05**  
(F450AP104J250C)



PHE450/F450, Film, Double Metallized Polypropylene, General Purpose, 0.1 uF, 5%, 250 VDC, 85°C, Lead Spacing = 10mm

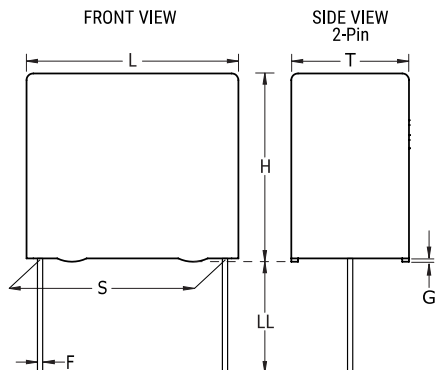

General Information	
<b>Series:</b>	PHE450/F450
<b>Dielectric:</b>	Double Metallized Polypropylene
<b>Style:</b>	Radial
<b>Features:</b>	Pulse
<b>RoHS:</b>	Yes
<b>Lead:</b>	Wire Leads
<b>AEC-Q200:</b>	No
<b>Miscellaneous:</b>	The Rated Voltage Decreases 1.3%/C Between +85C And +105C. Rthha= 105 C/W (85C), 0.2 m/s.

Dimensions	
<b>L</b>	13mm -0.5mm
<b>H</b>	12mm -0.5mm
<b>T</b>	6mm -0.5mm
<b>S</b>	10mm +0.4/-0.4mm
<b>LL</b>	5mm -1mm
<b>F</b>	0.6mm +/-0.05mm
<b>G</b>	0.5mm NOM

Specifications	
<b>Capacitance:</b>	0.1 uF
<b>Capacitance Tolerance:</b>	5%
<b>Voltage AC:</b>	180 VAC
<b>Voltage DC:</b>	250 VDC (85C), 185 VDC (105C)
<b>Temperature Range:</b>	-55/+105°C
<b>Rated Temperature:</b>	85°C
<b>Dissipation Factor:</b>	0.03% 1kHz, 0.04% 10kHz, 0.15% 100kHz
<b>Insulation Resistance:</b>	300 GOhms
<b>Max dV/dt:</b>	700 V/us
<b>Inductance:</b>	6 nH

Packaging Specifications	
<b>Packaging:</b>	Bulk, Bag
<b>Packaging Quantity:</b>	600

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

