


Film, Metallized Polypropylene, Safety, R46, 0.68 uF, 10%, 630 V, 310 V, 110C, Lead Spacing = 22.5mm

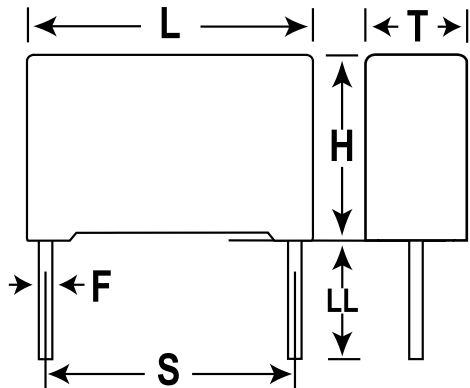

| General Information | |
|---------------------|--------------------------|
| Dielectric: | Metallized Polypropylene |
| Style: | Radial |
| Series: | R46 |
| Features: | Pulse |
| RoHS: | Yes |
| Lead: | Cut |
| Approvals: | ENEC, UL, cUL, CQC |

| Dimensions | |
|------------|-----------------|
| L | 26.5mm +0.3mm |
| H | 18.5mm +0.1mm |
| T | 10mm +0.2mm |
| S | 22.5mm +/-0.4mm |
| LL | 4mm +2mm |
| F | 0.8mm +/-0.05mm |

| Specifications | |
|------------------------|---------------|
| Capacitance: | 0.68 uF |
| Capacitance Tolerance: | 10% |
| Voltage DC: | 630 VDC |
| Voltage AC: | 310 VAC |
| Temperature Range: | -40/+110C |
| Rated Temperature: | 110C |
| Dissipation Factor: | 0.1% 1kHz |
| Insulation Resistance: | 44.1176 GOhms |
| Max dVdt: | 200 V |
| Safety Class: | X2 |

| Packaging Specifications | |
|--------------------------|------|
| Packaging: | Bulk |
| Packaging Quantity: | 396 |