


# RF185A2JEGB Datasheet

## Product Name // 1.85mm Jack Straight 2 Hole Flange RF Connector

[View Product Page](#)

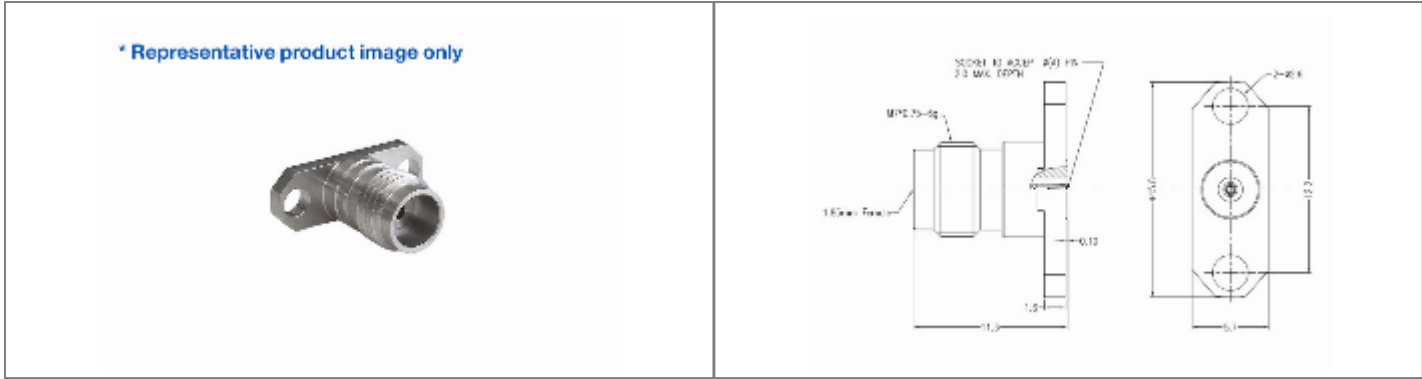

// Product Description:	
1.85mm Jack Straight 2 Hole Flange RF Connector	Dielectric withstanding Voltage: >500V
Maximum Voltage: 150V	Impedance: 50Ohm
Temperature range: -40Â°C to +85Â°C	Body Material: Stainless Steel Passivation
Frecuency range: 0GHz - 65GHz	Contact Material: Beryllium Copper
VSWR:	

// General Information:	
Product Display Title:	1.85mm Jack Straight 2 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	1.85mm Series
Weight:	1
Body Length:	11.30mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>500V
Durability:	>500 cycles
Flange Mount Length:	15.80mm
Function:	Female Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	ULTEM 1000
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Mount Hole Distance:	12.20mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	65GHz
Socket Diameter:	0.30mm
Voltage Max:	150V
Vswr:	<1.30

// Product PDF Links

[1.85mm Series Product Datasheet](#)

// Product 3D CAD Model Links

[RF185A2JEGB3D CAD Model](#)