


# RFAA240P350J Datasheet

## Product Name // 2.4mm Plug to 3.5mm Jack RF Adapter

[View Product Page](#)

\* Representative product image only

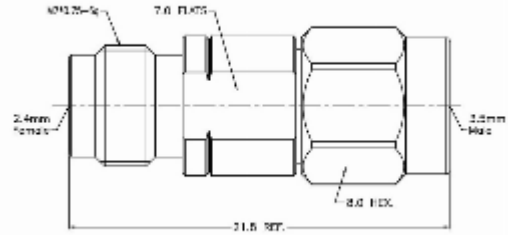

### // Product Description:

- ⊕ 2.4mm Plug to 3.5mm Jack RF Adapter
- ⊕ Maximum Voltage: 250V
- ⊕ Temperature range: -40Â°C to +85Â°C
- ⊕ Frequency range: 0GHz - 33GHz
- ⊕ VSWR:
- ⊕ Dielectric withstanding Voltage: >750V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

### // General Information:

Product Display Title:	RF Adapter Series 2.40mm Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Weight:	1
Body Length:	19.40mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Male to Female RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	33GHz
Thread Size:	1/4 36UNS 2A
Voltage Max:	250V
Vswr:	<1.15

#### // Product PDF Links

[RF Adapter Series Product...](#)

#### // Product 3D CAD Model Links

[RFAA240P350J3D CAD Model](#)