


RFAA292J292J Datasheet

Product Name // 2.92mm Jack to Jack RF Adapter

[View Product Page](#)

* Representative product image only

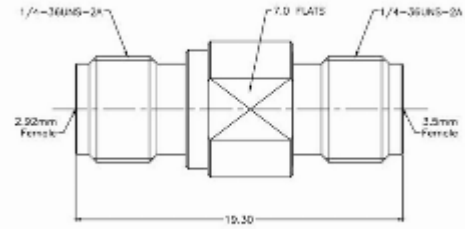

// Product Description:

- ⊕ 2.92mm Jack to Jack RF Adapter
- ⊕ Maximum Voltage: 250V
- ⊕ Temperature range: -40Å°C to +85Å°C
- ⊕ Frequency range: 0GHz - 40GHz
- ⊕ VSWR:
- ⊕ Dielectric withstanding Voltage: >750V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

// General Information:

Product Display Title:	RF Adapter Series 2.92mm Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Weight:	1
Body Length:	19.30mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Female to Female RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	40GHz
Voltage Max:	250V
Vswr:	<1.20

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFAA292J292J3D CAD Model](#)