



REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	Mar.29/06	L.CHAN

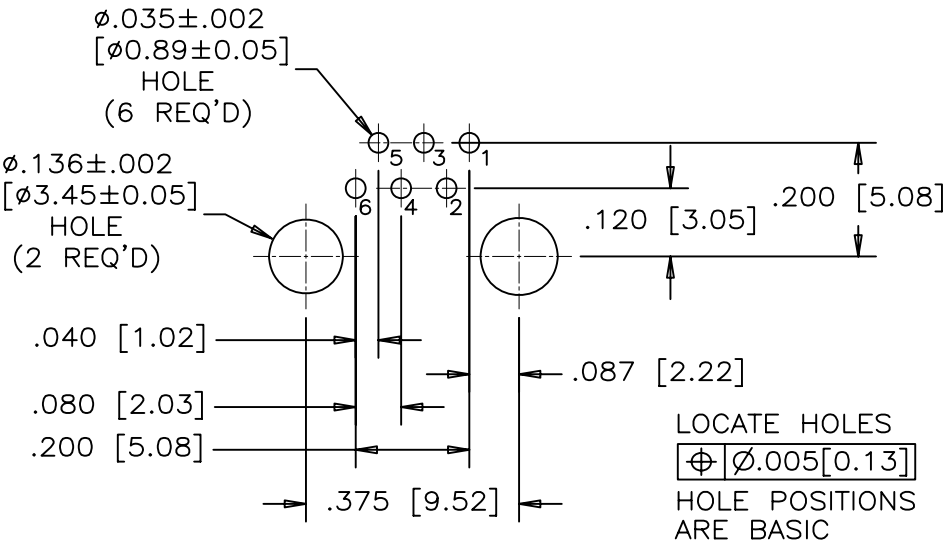


MATERIALS:

- PLASTIC HOUSING:
 HIGH TEMPERATURE RESISTANT NYLON
 UL FLAMMABILITY RATING 94V-0.
 INFRA-RED OVEN COMPATIBLE
- CONTACTS:
 PHOSPHOR BRONZE
- CONTACT PLATING:
 50 MICROINCHES [1.27 MICRONS] MINIMUM NICKEL.
 50 MICROINCHES [1.27 MICRONS] MINIMUM GOLD
 ON MATING SURFACES
 100 MICROINCHES [2.54 MICRONS] MATTE TIN
 ON CONTACT TAILS.
- RECOMMENDED SOLDERING TEMPERATURE:
 WAVE SOLDERING OR REFLOW SOLDERING AT 260°C
 MAXIMUM FOR 5 SEC MAXIMUM.

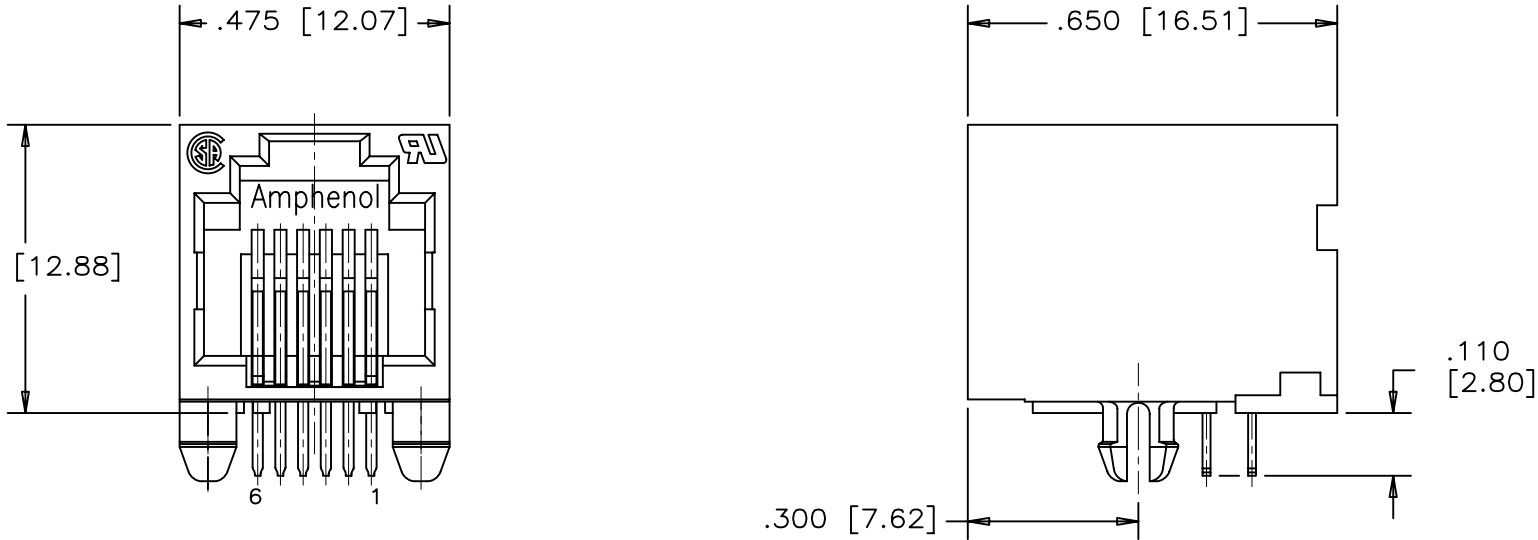

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

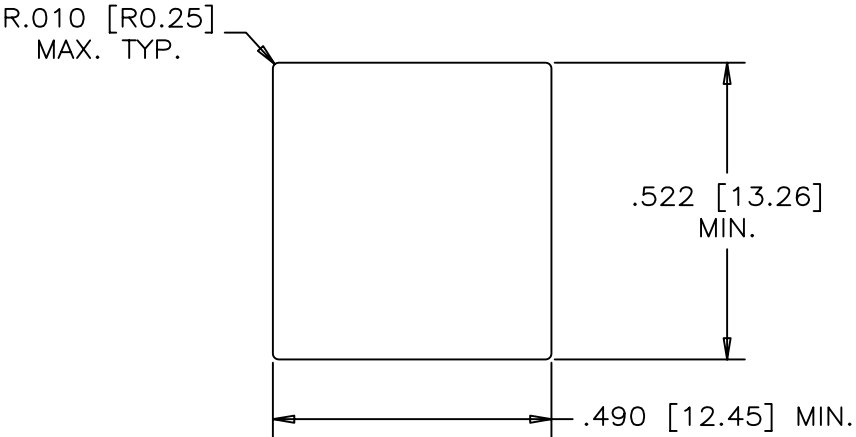

RECOMMENDED PANEL CUTOUT

PART NUMBER: RJE01-6X0-01

- CONTACT QTY.
- 2=2 CONTACTS
- 4=4 CONTACTS
- 6=6 CONTACTS

DRAWN PAUL WANG DESIGNED CHECKED CHIGOW I. E. APPRD. Q. A. APPRD. DWG. APPRD. ENG. REL. NO. REF. DIMENSIONS ARE IN INCHES [mm]	DATE 06/03/29 06/03/29	Amphenol Canada Corp.
TITLE HIGH SPEED MODULAR JACK,1 PORT, 6 POSITIONS,OPTIONAL CONTACTS, WITHOUT SHIELD – RoHS COMPLIANT	DWG C SCALE	DRAWING NO. P-RJE01-6X0-01 WT. ----- SURF. -----
CODE ID. NO. 03554	SHEET 1 OF 1	REV. A

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[RJE01-660-01](#)