


Capacitor, Tantalum, SMD, Polymer, Molded, High Energy Density, 330 uF, 7343, +/-20% Tol, 10V@85C

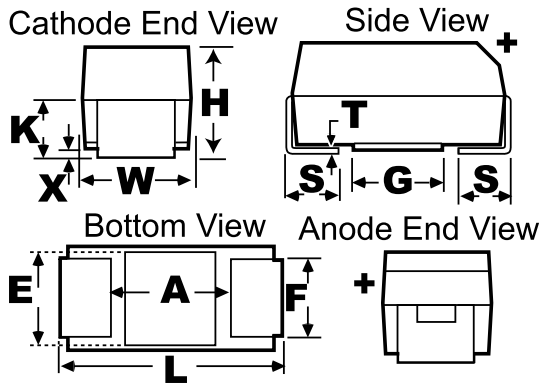

Dimensions (mm)		
Symbol	Dimension	Tolerance
L	7.3	+/-0.3
W	4.3	+/-0.3
H	3.8	+/-0.2
F	2.4	+/-0.1
S	1.3	+/-0.3
X	0.1	+/-0.1
P	1.7	REF
R	1	REF
T	0.13	REF
A	3.8	MIN
G	3.5	REF
E	3.5	REF

Notes:

-In polarity stripe, at KEMET's option, type may be indicated: no symbol = Standard MnO2 tantalum chip, O = LowESR T494, R = Low ESR T495, F = Fused T496, HT = 150C rated T498 (or B45196P, B45198P), H = 175C rated T499, M = Multiple anode construction T510 (and B45396R), KO = Organic cathode T520 or T521, KT = High temp organic cathode T525, KM = Multiple anode organic cathode T530, FD= Organic cathode face down terminals T528.

General Information	
Supplier:	KEMET
Part Type Description:	SMD, Polymer, Molded, High Energy Density
Construction:	Standard Chip-Polymer

Specifications	
Capacitance:	330 uF
Voltage DC @ 85C:	10V
Voltage DC @ 105C:	8.35V
Voltage DC @ 125C:	6.7V
Tolerance:	+/-20%
Application:	High Energy Density
Temperature Range:	-55/+105C
Body Type:	Molded Chip
ESR:	35 mOhm
Footprint:	7343
Termination:	Tin
RoHS:	Yes
Leakage Current:	330 uA
Dissipation Factor:	10%
Ripple @ 25C:	2.6 A
Ripple @ 85C:	1.82 A
Ripple @ 105C:	0.65 A

Packaging Specifications	
Package Kind:	T&R
Package Size:	7in
Package Quantity:	500