



Switches > Slide Switches



Contact Current Rating: .1 A

Configuration (Pole-Throw): Double Pole - Double Throw

Contact Base Material: Copper Alloy

Number of Actuators: Single

Number of Positions: 2

Features

Configuration Features

Configuration (Pole-Throw)	Double Pole - Double Throw
Number of Actuators	Single
Number of Positions	2

Electrical Characteristics

Contact Current Rating	.1 A
Operating Voltage	30 VDC

Body Features

Actuator Orientation	Top
Actuator Travel	2 mm[.079 in]
Actuator Material	Polyacetal
Actuator Color	Black

Contact Features

Contact Base Material	Copper Alloy
Switch Contact Plating Material	Silver

Termination Features

Termination Post & Tail Length	2.5 mm[.098 in]
Termination Method to PCB	Through Hole - Solder

Dimensions

Product Width	7.3 mm[.287 in]
---------------	-----------------



Product Length	11 mm[.433 in]
----------------	----------------

Actuator Length	2.01 mm[.079 in]
-----------------	------------------

Industry Standards

UL Flammability Rating	UL 94HB, UL 94V-0
------------------------	-------------------

Other

Grade	Instrumentation
-------	-----------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUN 2016 (169) Does not contain REACH SVHC
--	--


Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	--

Solder Process Capability	Wave solder capable to 265°C
---------------------------	------------------------------

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought

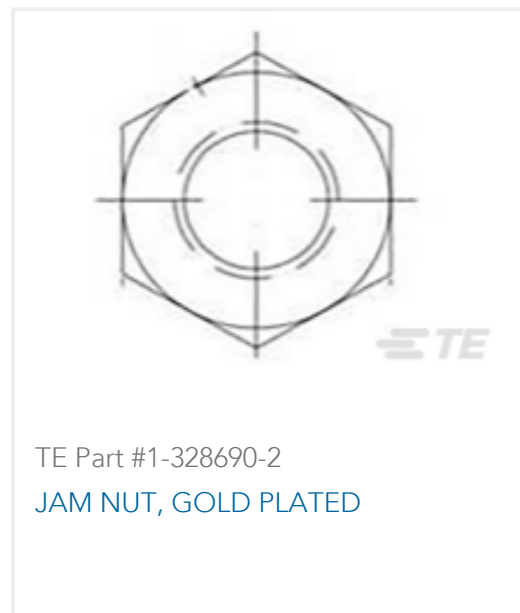

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1437575-5_B_c-1437575-5-b.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1437575-5_B_c-1437575-5-b.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1437575-5_B_c-1437575-5-b.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.