



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Industry Standards

Compatible With Agency/Standards Products	UL, CSA
---	---------

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple
Extraction Force	2.5 kgf

Other

Line	Budget
EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant



Packaging Features

Packaging Quantity	5000
Packaging Method	Strip/Reel

Dimensions

Product Length	18.9 mm[.744 in]
Compatible Insulation Diameter Range	2.54 – 4.32 mm[.1 – .17 in]
Terminal Material Thickness	.43 mm[.017 in]
Wire Size	.82 – 2.08 mm ²

Product Type Features

Insertion Force	Normal
-----------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per



homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



KIT
REPRESENTATION ONLY

TE Part # 7-2150060-7
OCEAN_2.0_SPARE_PART_KIT-110F180F



TE Part # 2150060-2
OCEAN_2.0_APPLICATOR-E-110F180F-REA



TE Part # 2150060-1
OCEAN_2.0_APPLICATOR-E-110F180F-REM



TE Part # 735211-2
250 FASTON REC 14-10 AWG TPBR



REPRESENTATION ONLY

TE Part # 755336-1
DAHT FASTON 22-14 ASSY




TE Part # 2232112-1
250 FASTON, REC., 18-14 AWG, TPBR




TE Part # 2232247-1
250 FASTON, REC., 16-10 AWG, BR


Also in the Series | FASTON 250



Compression Connectors(4)

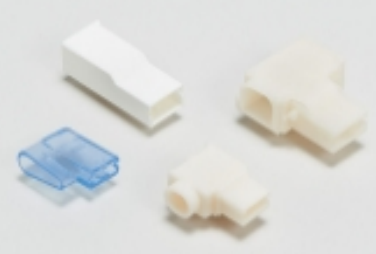

Crimp Terminal Housings(118)



Insertion & Extraction Tools(6)



Insulation Boots & Sleeves(16)



PCB Terminals(133)



Quick Disconnects(425)



Splices(4)

Customers Also Bought

TE Part #42563-2
250 FASTON FLAG REC 12-10 AWG
TPBRTE Part #179974-1
250 PL EX REC. 18-14AWG PTBRTE Part #CAT-G7534-P729A
Glow Wire GRACE INERTIA PlugTE Part #4-1123722-7
3.96 EP PLUG HSG 7P(RED)TE Part #41802
250 FASTON FLAG REC 18-12 AWG
TPBRTE Part #170011-2
RING STRIP 18-14 MM2 0.503 X 11.938
TPBRTE Part #1969458-3
POSI-LOK MKIII,7MM SILO POW
CORD,2P,BLUETE Part #1376388-2
5MM POWER KEY 2P PLUG HSG NUT
(W/O GF)TE Part #1969458-1
POSI-LOK MKIII, 7MM SILO POW
CORD,2P,RED

Documents

Product Drawings

250 FASTON,REC.,18-14 AWG,TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_170213-2_T.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_170213-2_T.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_170213-2_T.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Agency Approvals

[Agency Approval Document](#)

English