

PCN-112D3MHZ,000 ✓ ACTIVE



OEG | OEG Slimline PCB Relay PCN

TE Internal #: 3-1461491-3

General Purpose Power Relay, DC, Monostable, 1 Form A SPST-NO, 3 A Contact Rating, 12 VAC Coil Voltage, OEG Slimline PCB Relay PCN

[View on TE.com >](#)

Relays & Contactors > Electromechanical Relays > Slim PCB Relay, PCN 3A/5A, 12VDC



Relay & Contactor Type: **General Purpose Power Relay**

Current Type: **DC**

Coil Magnetic System: **Monostable**

Contact Arrangement: **1 Form A SPST-NO**

Contact Current Rating: **3 A**

[All Slim PCB Relay, PCN 3A/5A, 12VDC \(2\)](#)

Features

Contact Features

Contact Plating Material	Gold
Contact Material	AgNi

Dimensions

Insulation Clearance Between Contact & Coil	3.5 mm[.138 in]
Insulation Creepage Between Contact & Coil	3.5 mm[.138 in]
Product Width	5 mm[.196 in]
Product Length	20 mm[.787 in]
Product Height	12.5 mm[.492 in]

Packaging Features

Packaging Method	Tube
------------------	------

Other

Coil Power Rating Class	.1 – .15 W
-------------------------	------------



Contact Current Class	16 A
Environmental Ambient Temperature Class	70 – 85 °C
Height Class (Mechanical)	12 – 13 mm
Length Class (Mechanical)	16 – 20 mm
Width Class (Mechanical)	0 – 6 mm
EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Environmental Category of Protection	RTIII
Environmental Ambient Temperature (Max)	85 °C[185 °F]

Body Features

Product Weight	3 g[.1058 oz]
Primary Product Color	White
Enclosure Type	Flux Resistant Automatic Soldering & Washable

Electrical Characteristics

Contact Limiting Short-Time Current	3 A
Contact Limiting Making Current	3 A
Contact Limiting Continuous Current	3 A
Contact Limiting Breaking Current	3 A
Insulation Initial Dielectric Between Open Contacts	750 Vrms
Insulation Initial Dielectric Between Adjacent Contacts	750 Vrms
Coil Current	.01 A
Contact Switching Voltage (Max)	277 VAC
Contact Switching Load (Min)	100mA @ 5V
Coil Resistance	1200 Ω
Insulation Initial Resistance	1000 MΩ
Coil Power Rating AC	.01 VA
Contact Current Rating	3 A
Coil Voltage Rating	12 VDC
Contact Voltage Rating	30 VDC
Coil Power Rating DC	.12 W



Insulation Initial Dielectric Between Contacts & Coil	3000 Vrms
---	-----------

Configuration Features

Contact Special Features	Bifurcated/Twin Contacts
Contact Number of Poles	1
Coil Special Features	UL Coil Insulation Class F
Contact Arrangement	1 Form A SPST-NO

Operation/Application

Solder Process	Wave Solder
Shock Resistance	100G's, 11ms
Current Type	DC
Coil Magnetic System	Monostable

Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

Termination Features

Main Termination & Connection Type	Solder Pins
Coil Termination & Connection Type	Solder Pins

Mechanical Attachment

Product Mount Type	Board Mount
--------------------	-------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | OEG Slimline PCB Relay PCN

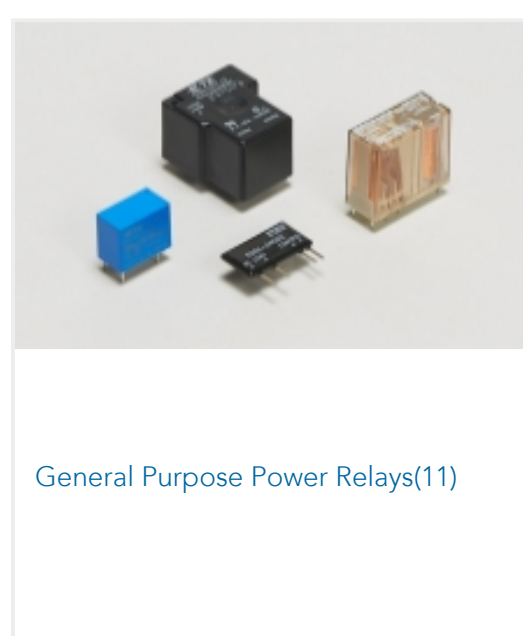

Customers Also Bought

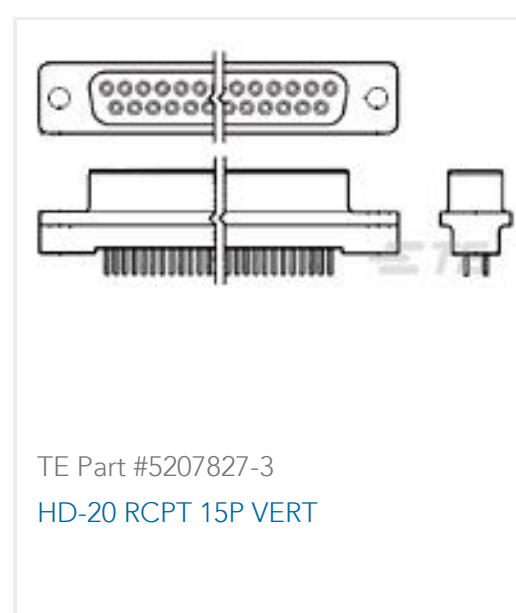



Documents

Product Drawings

[PCN-112D3MHZ,000](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_3-1461491-3_J1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-1461491-3_J1.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-1461491-3_J1.2d_dxf.zip](#)

English

[3D PDF](#)

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[PCNH Relay Datasheet](#)

English

[PCN Series Relay Data Sheet English](#)

English

Product Specifications

[PCN-112D3MHZ](#)

Japanese

[Definitions General Purpose Relays](#)

English

Agency Approvals

[VDE Certificate](#)

English