

D369-B33-AS0 ✓ ACTIVE

DEUTSCH | DEUTSCH 369

TE Internal #: YD369-B33-AS000000

Connector Assembly, Receptacle, Crimp, Wire-to-Wire, Normal, 3 Position, 2.54 mm [.1 in] Centerline, DEUTSCH 369, Standard Rectangular Connectors

[View on TE.com >](#)



Connectors > Rectangular Connectors > Standard Rectangular Connectors



Connector Product Type: **Connector Assembly**

Connector & Housing Type: **Receptacle**

Mating Alignment: **With**

Mating Alignment Type: **Keyed**

Mating Retention: **With**

Features

Dimensions

Row-to-Row Spacing	2.54 mm [.1 in]
Compatible Insulation Diameter Range	.71 – 1.37 mm [.028 – .054 in]

Body Features

Connector & Keying Code	A
Connector Seal Color	Natural
Seal Material	Fluorosilicone
Cable Exit Angle	180°
Seal Type	Interfacial Seal, Panel Gasket, Grommet Seal
Primary Product Color	Red

Electrical Characteristics

Operating Voltage	400 VAC
-------------------	---------

Housing Features

Housing Material	Composite
Shell Material	Composite
Centerline (Pitch)	2.54 mm [.1 in]

Configuration Features



Number of Columns	3
Number of Signal Positions	3
Number of Cavities	3
Number of Power Positions	3
Contacts Preloaded	Yes
Number of Positions	3
Number of Rows	1

Contact Features

Contact Size	Size 22
Contact Type	Socket
Contact Retention Within Housing	With
Contact Current Rating (Max)	5 A

Mechanical Attachment

Panel Mount Feature Type	Mounting Hole
Mating Alignment	With
Mating Alignment Type	Keyed
Mating Retention	With
Mating Retention Type	Button Latch
Connector Mounting Type	Panel Mount

Product Type Features

Connector Seal & Plug Type	Triple-Seal
Connector Shell Size	03
Connector Product Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Insertion Force Type	Normal
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Usage Conditions

Operating Temperature Range	-55 – 175 °C[-67 – 347 °F]
-----------------------------	----------------------------



Operation/Application

Shielded	No
Circuit Application	Power & Signal

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 245°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | DEUTSCH 369

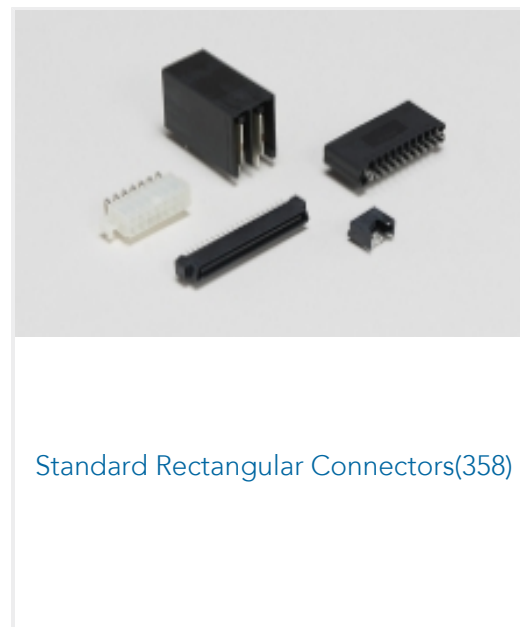

Customers Also Bought





Documents

Product Drawings

[369 3 WAY PANEL MNT REC, NO CONTACTS,SKT](#)

English

[369 3 WAY PANEL MNT REC, NO CONTACTS,SKT](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_YD369-B33-AS000000_AA.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_YD369-B33-AS000000_AA.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_YD369-B33-AS000000_AA.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.